

# MIC - DVR - A

## SPECIFICATIONS:

**Sensitivity:**  $>0.15V / \mu \text{ bar}$

**Frequency:** 100-5500HE


**Voltage:** 6-12VDC (Suggest to use 8V)

**Vivid output:**  $>3Vp-p$  (Impedance  $1K \Omega$ )

**Transit Distance:** 400-1000m (6-12VDC)

**Temperature:** 0 C-40 C

**Sensitivity can be changed**

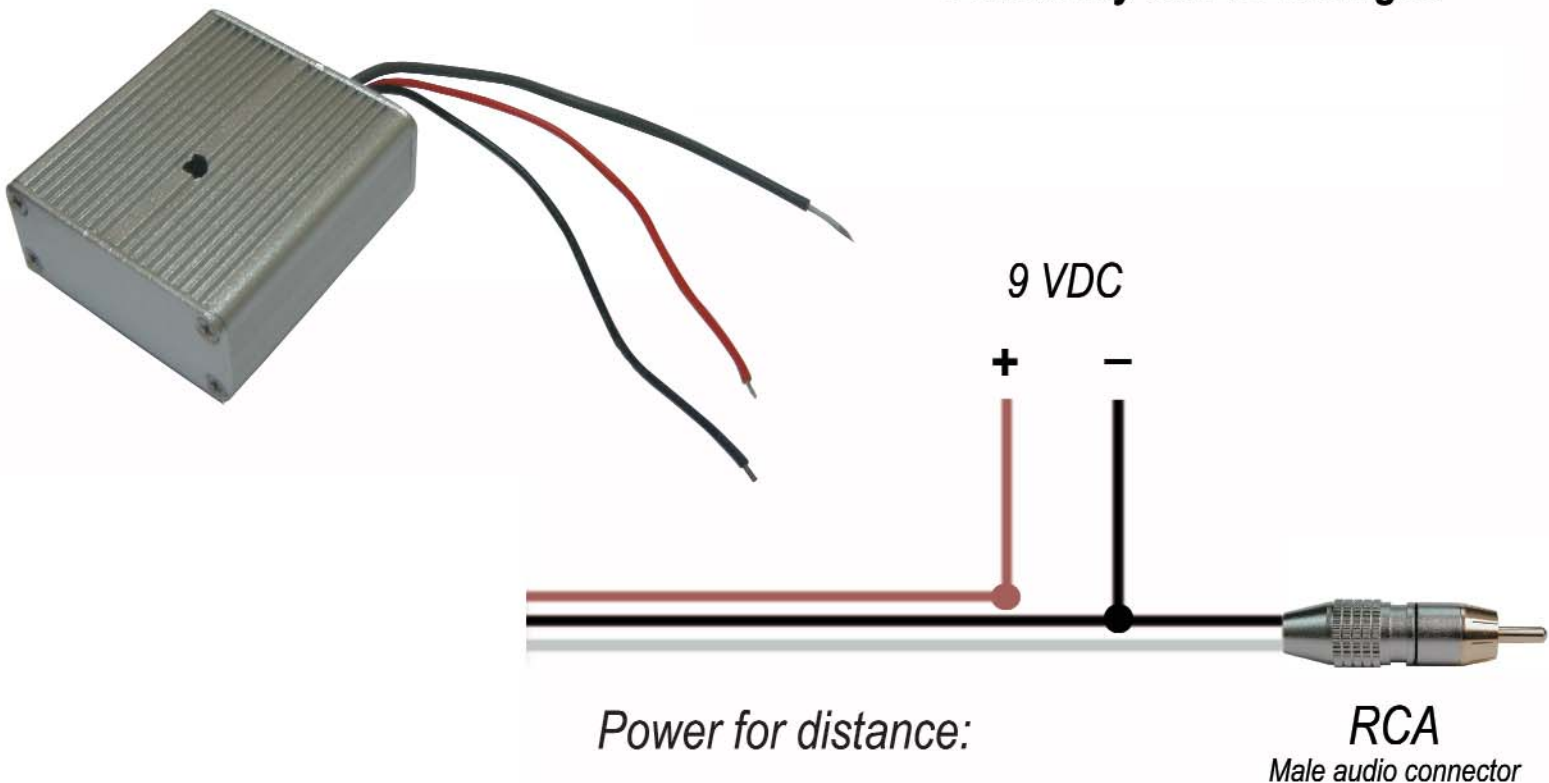

5 VDC = 300m  
9 VDC = 600m  
12 VDC = 1000m

### Note:

\* Do not connect 12 VDC if distance is less than 600m.

\* Sensitivity adjustment is on the back of the microphone.