



## *INTEGRATE*

- *POS Devices*
- *ATM Machines*
- *Access Controls*
- *Customer Displays*


*WITH VIDEO SOURCE.*

## **UNIVERSAL TEXT INSERTER VDM - 1200**



- *TEXT OVERLAY ON VIDEO / LOOP OUT*
- *ALARM INPUT / OUTPUT WITH DISPLAY*
- *LAN CONNECTIVITY \**
- *CAMERA IDENTIFIER INPUT*
- *RS - 485 DATA OUTPUT*
- *RS - 232 PRINTER IN / OUT*
- *VOLTAGE OUTPUT FOR ALARM DEVICES*
- *ALARM TRIGGER ON KEYWORDS (Void, No Sale, Return)*

*\* Future Application*

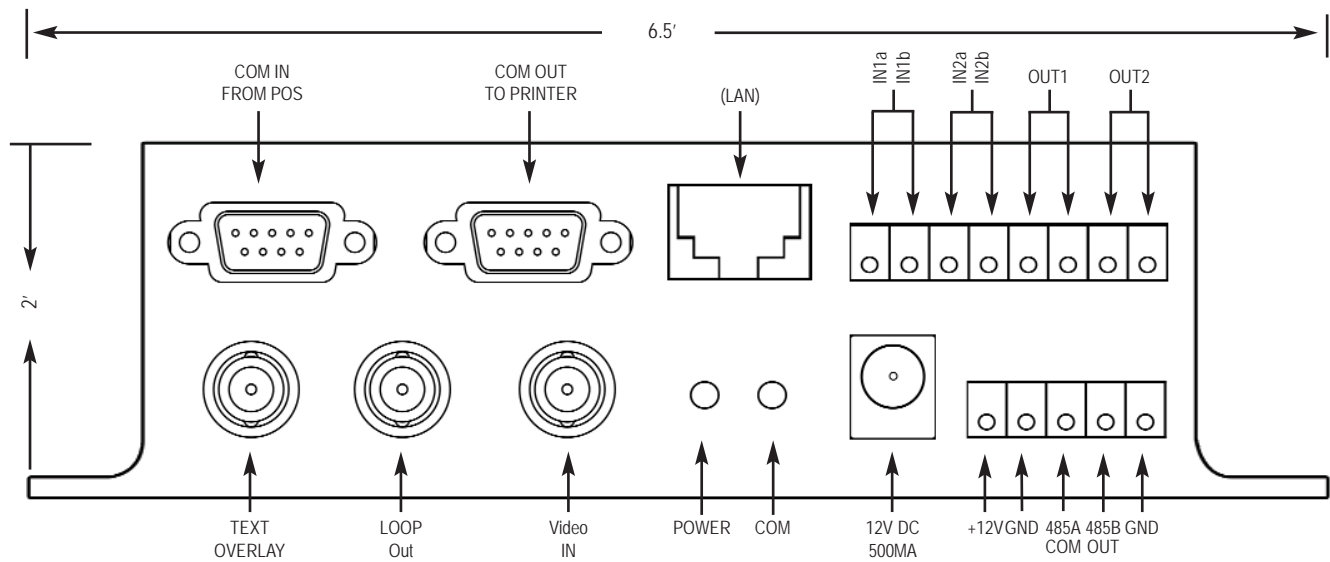

ITEM		Specifications
Model		VDM 1200
CPU		PHILIPS 89V51RB2
INPUT		Composite 1V P-P 75 OHM BNC NTSC / PAL
Physical Environment		0°C~ 70°C / 32°F~158°F for operation
		-20°C~110°C / -4°F~230°F for non operation (Storage Temperature)
		10%~70%: Humidity for operation
Port I/O	RS-232	POS Data IN/OUT Baud rate: 9600[bps] Parity : NONE, EVEN, ODD
	RS-485	POS Data
	LAN	Optional Data In/Out Built in Server
	Relay Output	2 Relay Output (NO, COM)
	Function Display	Power, Data, Relay, Sensor
Power	Maximum Power spec.	DC 12V - 500MA
	DC Input Voltage	DC 12V
Dimensions		6.5' X 2' X 4.75'
Weight		1.8lb / 0.820kg